
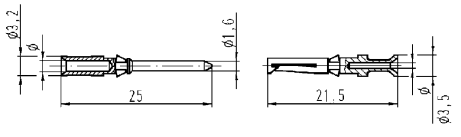




Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han D®, Crimp contact, Contact surface: Gold plated 	0.14 ... 0.37	09 15 000 6124	09 15 000 6224	 <table border="1"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37 mm² AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm² AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm² AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm² AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm² AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm² AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table>	Conductor cross-section	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm	0.5	09 15 000 6123	09 15 000 6223
	Conductor cross-section	Ø	Stripping length																									
	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																									
	0.5 mm ² AWG 20	1.1 mm	8 mm																									
	0.75 mm ² AWG 18	1.3 mm	8 mm																									
	1 mm ² AWG 18	1.45 mm	8 mm																									
1.5 mm ² AWG 16	1.75 mm	8 mm																										
2.5 mm ² AWG 14	2.25 mm	6 mm																										
0.75	09 15 000 6125	09 15 000 6225																										
1	09 15 000 6122	09 15 000 6222																										
1.5	09 15 000 6121	09 15 000 6221																										
2.5	09 15 000 6126	09 15 000 6226																										
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																								