
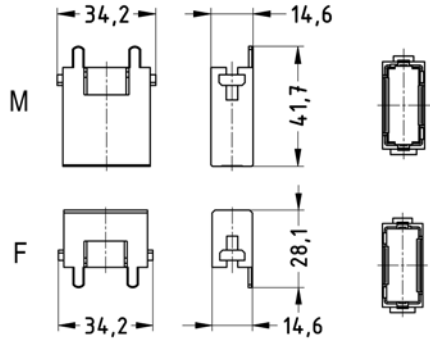

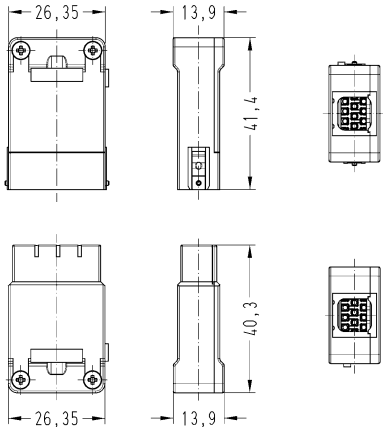

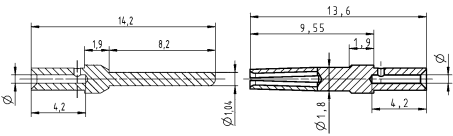


Number of contacts

# 20

4 A 32 V 0.8 kV 3  
+ shielding

Modu-  
lar

Identification	Conductor cross-section (mm <sup>2</sup> )	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular®, Adapter module, Han® Gigabit module, Han® Shielded module, Han® Megabit module 		09 14 001 3011	09 14 001 3111																
Han® Shielded Module insert, Crimp termination  Please order crimp contacts separately.	0.09 ... 0.52	09 14 020 3013	09 14 020 3113																
D-Sub, Standard, Crimp contact 	0.09 ... 0.25 0.13 ... 0.33 0.25 ... 0.52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	 <table border="1" data-bbox="995 1688 1449 1836"> <thead> <tr> <th>Conductor cross-section</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm<sup>2</sup></td> <td>0.64 mm</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm<sup>2</sup></td> <td>0.88 mm</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm<sup>2</sup></td> <td>1.13 mm</td> <td>4 mm</td> </tr> <tr> <td>0.33-0.82 mm<sup>2</sup></td> <td>1.34 mm</td> <td>4 mm</td> </tr> </tbody> </table> <p>for stranded wire according IEC 60228 Class 5</p>	Conductor cross-section	Ø	Stripping length	0.09-0.25 mm <sup>2</sup>	0.64 mm	4 mm	0.13-0.33 mm <sup>2</sup>	0.88 mm	4 mm	0.25-0.52 mm <sup>2</sup>	1.13 mm	4 mm	0.33-0.82 mm <sup>2</sup>	1.34 mm	4 mm
Conductor cross-section	Ø	Stripping length																	
0.09-0.25 mm <sup>2</sup>	0.64 mm	4 mm																	
0.13-0.33 mm <sup>2</sup>	0.88 mm	4 mm																	
0.25-0.52 mm <sup>2</sup>	1.13 mm	4 mm																	
0.33-0.82 mm <sup>2</sup>	1.34 mm	4 mm																	