


Number of contacts

30, 20

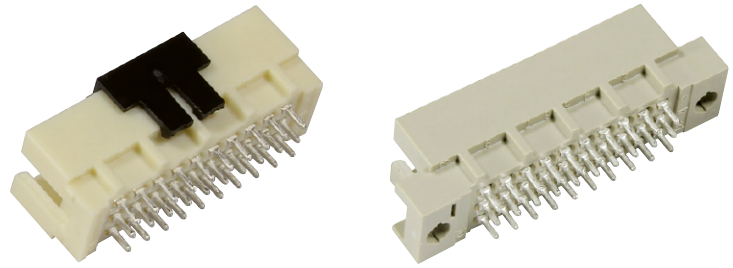

Male connectors

DIN Signal up to 2 A

Identification	No. of contacts	Contact arrangement	Part number	Performance levels according to IEC 60603-2. Explanation chapter 00	
			3	2	1
Male connector with solder pins 2.5 mm	with fixing flange		Performance level 3 on request	09 29 130 6902	Performance level 1 on request
	with fixing flange, THR			09 29 120 6902	
	with fixing flange, THR, on a reel			09 29 130 6519 ^{d)}	
	without fixing flange			09 29 130 6519 792 ^{d)}	
	without fixing flange, THR			09 29 130 6592	
	without fixing flange, THR, on a reel			09 29 130 6569 ^{d)}	
Male connector with solder pins 4.0 mm	with fixing flange			09 29 130 6903	
	with fixing flange, THR			09 29 120 6903	
	without fixing flange			09 29 130 6520 ^{d)}	
	without fixing flange, THR			09 29 130 6593	
				09 29 130 6570 ^{d)}	
Male connector with solder pins 13 mm	with fixing flange		09 29 130 6577		
	with fixing flange, THR		09 29 120 6577		
			09 29 130 6521 ^{d)}		
Male connector with wrap posts ¹⁾ 13 mm	with fixing flange		09 29 130 6907		
Male connector with press-in pins 5.0 mm	with fixing flange		09 29 130 6904		
	without fixing flange		09 29 120 6904		
			09 29 130 6504		

¹⁾ To be used only for wire wrap termination
^{d)} CTI > 400