
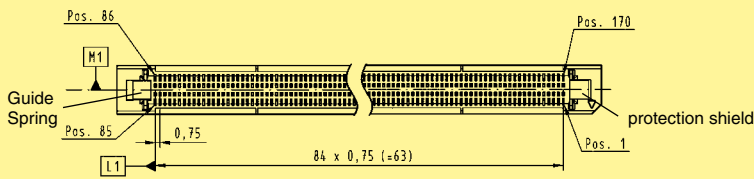



Card edge connectors, straight

Identification	No. of contacts	Contact length [mm] termination side	Part number
AdvancedMC™ connectors for MicroTCA™ with GuideSpring ①	170	2.1	16 11 170 5202 000
with GuideSpring and protection shield ②	170	2.1	16 11 170 5205 000
with GuideSpring and alignment peg ③	170	2.1	16 11 170 5206 000
with GuideSpring, protection shield and alignment peg	170	2.1	16 11 170 5207 000

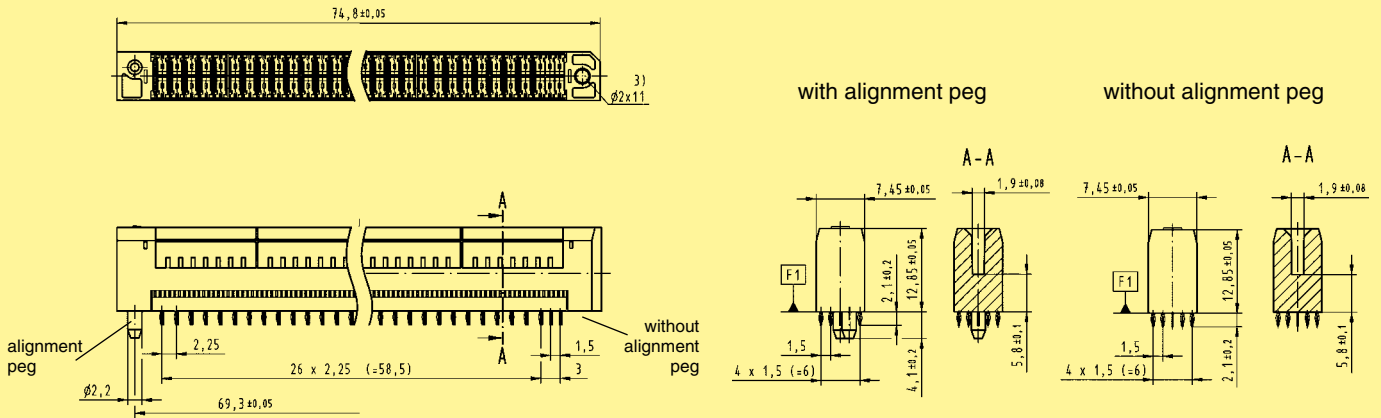

- recommended plated through hole specification see page 16
- non-metallized drillings optional: for part numbers 16 11 170 5202 000 and 16 11 170 5205 000 mandatory: for part numbers 16 11 170 5206 000 and 16 11 170 5207 000
- for optional fixing: use self-tapping screws for plastic, 2.2 x length (length = PCB thickness + min. 6.5 mm to max. 10 mm) e.g. HARTING part number 09 06 001 9974 Screwing torque references:
PCB + 6.5 mm: 20 cNm
PCB + 10 mm: 40 cNm

Board drillings (view magnified)

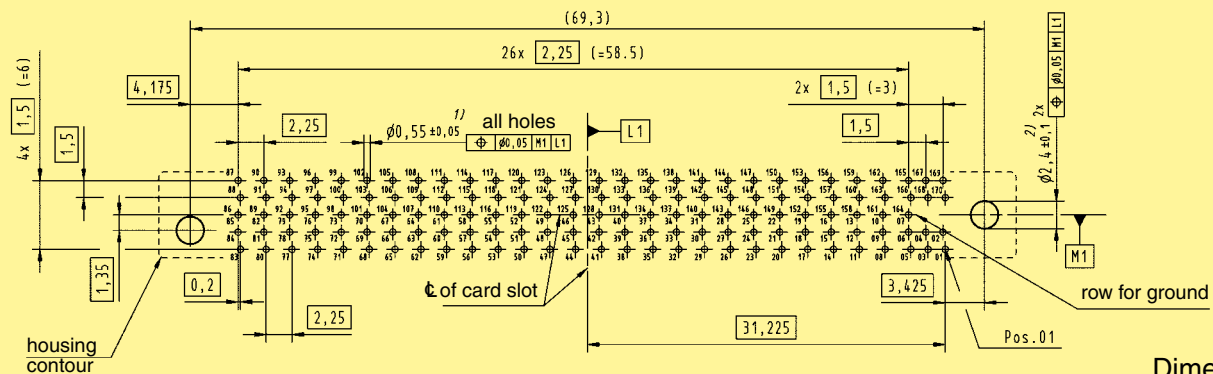

Dimensions [mm]