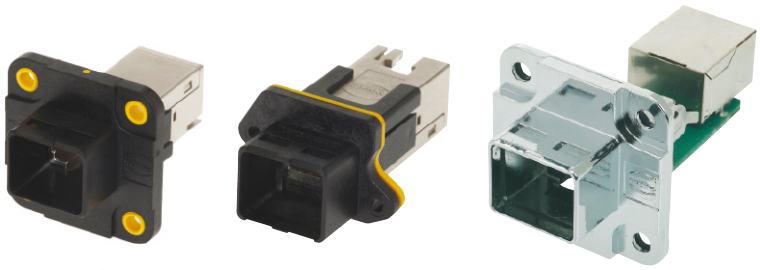

HARTING PushPull acc. to IEC 61 076-3-106 variant 4
RJ45 panel feed-throughs

Advantages

- Small, space-saving PushPull Interfaces in IP65 / IP67
- Easy handling of RJ45 patch cords in switch cabinets or sets
- Mounting to casings

Technical characteristics

Locking	PushPull Technology acc. to IEC 61 076-3-106 variant 4
Transmission rate Cat. 5 versions	10/100/1000 Mbit/s
Transmission rate Cat. 6 versions	10/100 Mbit/s 1/ 10 Gbit/s
Shielding	fully shielded, 360° shielding contact
Mating cycles	min. 750
Degree of protection	IP65 / IP67
Temperature range	-40 °C … +70 °C
Housing material	Plastic, black Zinc die-cast, shining
Flammability acc. to UL 94	V0
	UL approval (E102079)

Identification	Part number	Drawing	Dimensions in mm
Panel feed-through set category of transmission Cat. 5			
incl. housing bulkhead mounting EasyInstall metal with integrated seal, 2 x RJ45-jack board drillings for M3	09 45 295 1130	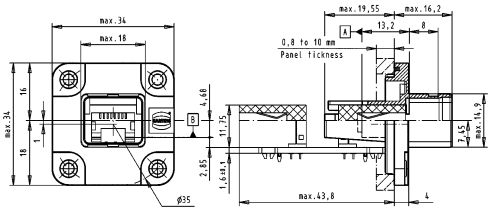	
Panel feed-through set category of transmission Cat. 6			
incl. housing bulkhead mounting EasyInstall with integrated seal, 2 x RJ45-jack board drillings for M3	09 45 245 1590	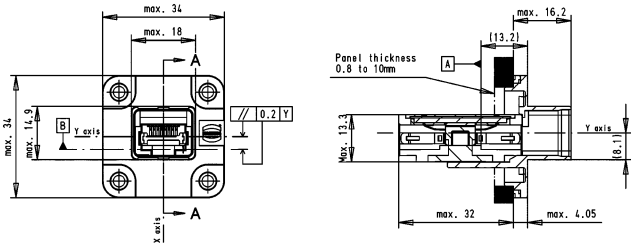	
incl. housing bulkhead mounting Compact, with integrated seal, 2 x RJ45-jack	09 45 245 1560	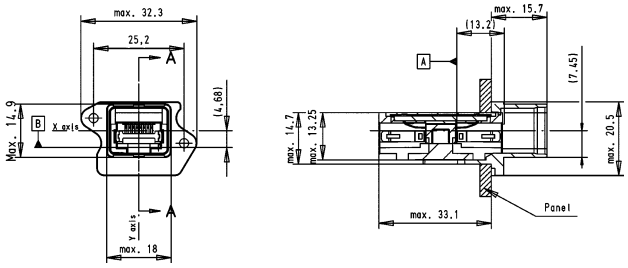	

Connecting hardware