



Pushing Performance




People | Power | Partnership

The key technology for Ethernet cabling.  
**preLink®**

---

# preLink® – a superior combination of speed and reliability

preLink®  
now available  
across the full  
product range

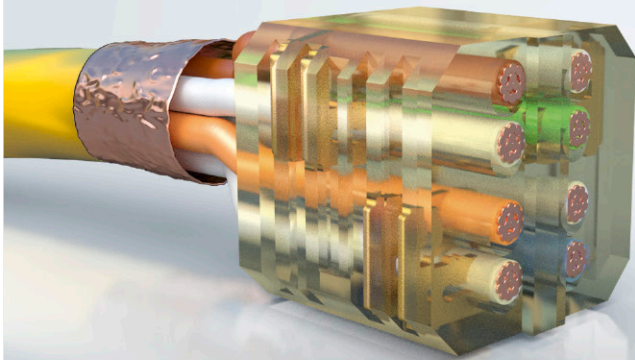

HARTING's preLink®


is a complete solution for implementing Ethernet cabling.

This system solution is a comprehensive product range that offers versatile swappable mating profiles, device interfaces and corresponding junction boxes.

The preLink® termination block is at the heart of the system: it can be wired with total safety in one step using our preLink® crimping tool. This ensures that your cabling remains versatile and sustainable into the future – with 100% **process reliability!**


**The same three simple steps are required for each installation:**

1

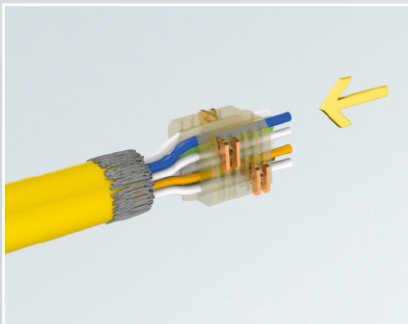


The cable wires are inserted into the preLink® termination block according to their colour codes.

2

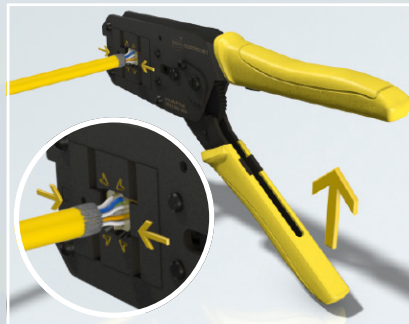

The preLink® crimping tool ensures that the wires are always assembled precisely and correctly.

3

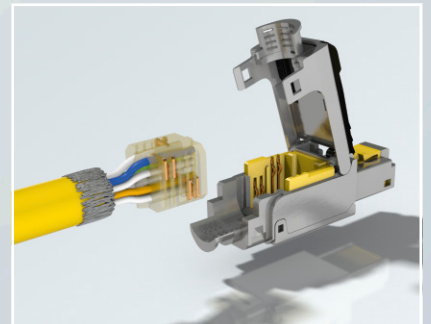


The wired preLink® termination block can then easily be snapped onto a variety of different preLink® mating profiles.

**preLink® in action:**

Check out our Youtube clip.



Find out more about the preLink® now at [www.HARTING.com/preLink](http://www.HARTING.com/preLink)

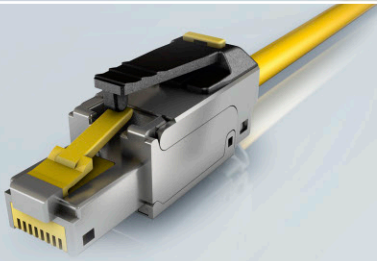

**preLink®  
RJ45 connector**  
For PROFINET connections




**The Han® PushPull V14 preLink®  
RJ45 connector**  
For AIDA interfaces




**preLink®  
M12 D-coded connector**  
For sensor interfaces



**preLink®  
M12 X-coded connector**  
For railway applications

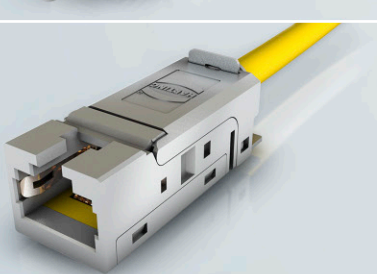

**preLink®  
RJ45 jack HIFF-format**  
For panel feed throughs and  
service interfaces

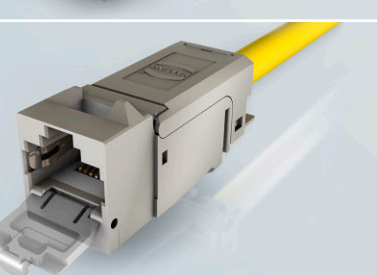

**preLink®  
RJ45 Keystone jack**  
For electrical cabinet patch panels and outlets



**preLink® Extender**  
For cable extensions and  
cable transitions: solid-stranded



## preLink® An overview of the advantages:

- Swappable mating profiles: for versatile and sustainable Ethernet cabling
- Our preLink® assembly tool ensures a reliable installation process
- Easy, quick installation in cramped spaces
- Pre-assembled cable segments can be swapped out quickly during maintenance and upgrades
- Comprehensive system-based product portfolio for automation, railway and energy applications

### RJ45 connector



- Robust and compact
- For safe installation – even in difficult situations
- Optimised external dimensions provide exceptional plugging reliability for industrial switches

IP20

CAT. 6<sub>A</sub>PROFI  
NET

### har-port service interfaces




- Attractive service interfaces for initial commissioning and servicing
- Fits into any housing opening with a standardised M22.5 panel cut-out – thanks to our compact HIFF (HARTING industrial form factor) RJ45 jack

IP20


CAT. 6<sub>A</sub>

### DIN rail outlet



- Easy to install on the DIN rail
- Integrated shield connection to DIN rails in the electrical cabinet
- Small space saving design
- Compatible with standardised Keystone-format

IP20

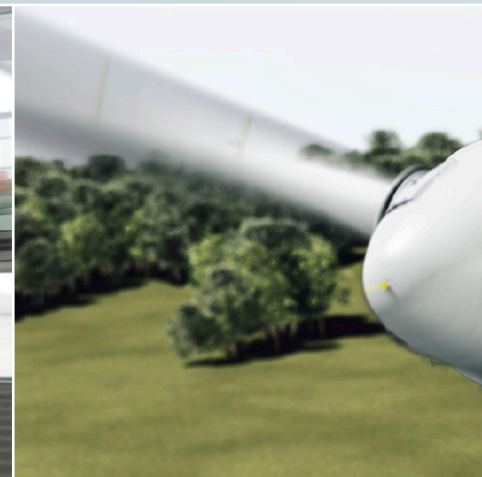CAT. 6<sub>A</sub>

### Han® PushPull connector Electrical cabinet interface and device interface



- Standardised and easy-to-operate PushPull interface
- PROFINET-compliant
- Quick and reliable installation – also for IP65 / IP67 degree of protection



### M12 connectors and jacks



- Proven M12 robustness
- PROFINET-compliant
- Quick and reliable installation – also for IP65 / IP67 degree of protection
- Quick upgrades from Fast Ethernet to Gigabit Ethernet are possible – thanks to the uniform housings for 4-pole D-coded and 8-pole X-coded



### Industrial junction boxes



- Robust, indestructible junction boxes for Han® 3 A und PushPull interfaces
- With optimised cable clamp – so that the cable can be conveniently assembled outside the junction box.
- Quick and reliable installation – also for IP65 / IP67 degree of protection
























### Patch panels and RJ45 jacks



- Industrial 19"-format termination technique
- Compatible to the standardised Keystone-format
- Assembled with 24 Keystone jacks: available as ready-to-use system



			Advantages	Description	Part number
Components in Keystone-format	Jacks		<ul style="list-style-type: none"> <li>Standardised Keystone-format fits for 19" patch panels and outlets</li> <li>Built-in protective cover</li> </ul>	preLink® RJ45 jack with Cat. 6, Keystone-format incl. cable termination block AWG 24 - AWG 22	20 82 501 0001
				preLink® RJ45 jack with Cat. 6, Keystone-format (without cable termination block) Angled version (without cable termination block)	20 82 500 0001 20 82 500 0002 (Package quantity: 24 pieces)
	19" patch panel		<ul style="list-style-type: none"> <li>Fits with all Keystone-format jacks</li> <li>Inexpensive because of simple set up</li> <li>Additional strain relief mechanism</li> </ul>	19" patch panel, Keystone-format, empty	20 82 400 0002
				19" patch panel, Keystone-format assembled with 24 preLink® jacks for AWG 22 / 23	20 82 405 0001
	DIN rail outlet		<ul style="list-style-type: none"> <li>Fits with all Keystone-format jacks</li> <li>Built-in cover protects against dust</li> <li>Labelling field</li> </ul>	DIN rail outlet, single, empty Cover plate set (with 2 covers)	09 45 851 0000 09 45 851 0001
				DIN rail outlet, single, empty, for row installation Cover plate set	09 45 851 0002 09 45 851 0003
Jacks	M12		<ul style="list-style-type: none"> <li>Highest robustness for railway and industry</li> </ul>	preLink® M12 cable jack, D-coded, 4 poles	20 82 005 2001
	PCB			preLink® M12 cable jack, X-coded, 8 poles	20 82 006 2001
				preLink® PCB jack, THR, 8 poles	20 82 007 1100
HIFF-format components	Jacks		<ul style="list-style-type: none"> <li>HIFF-format: for use in Han® 3 A, HARTING PushPull (V4), Han® PushPull (V14) and har-port</li> </ul>	preLink® RJ45 jack with Cat. 6, HIFF-format incl. cable termination block AWG 24 - AWG 22 AWG 27 - AWG 26	20 82 001 0001 20 82 001 0002
				preLink® RJ45 jack with Cat. 6, HIFF-format without cable termination block	20 82 000 0002
	19" patch panel		<ul style="list-style-type: none"> <li>Fits with HIFF-format jacks</li> <li>Movable jack carrier - helps to save time and money during the assembly process</li> <li>Additional strain relief mechanism</li> </ul>	19" patch panel, HIFF-format, empty	20 82 400 0001
	Junction boxes		<ul style="list-style-type: none"> <li>Robust aluminium die cast housing</li> <li>Easy to assemble</li> <li>External attachment and earth connections</li> <li>Degree of protection: IP65 / IP67</li> </ul>	Han® 3 A metal outlet, with 2 Han® 3 A RJ45 ports, assembled with 2 preLink® HIFF-format jacks, for AWG 22 / 23	20 82 102 0101
				Han® PushPull (V14) metal outlet, with 2 Han® PushPull RJ45 ports, assembled with 2 preLink® HIFF-format jacks, for AWG 22 / 23	20 82 104 0101
	Device interfaces		<ul style="list-style-type: none"> <li>Fits with HIFF-format jacks</li> <li>Standardised interfaces can be easily implemented in devices as well as electrical cabinets</li> <li>Degree of protection: IP65 / IP67</li> </ul>	Han® 3 A bulkhead mounted housing Black plastic Grey plastic	09 20 003 0327 09 20 003 0301
				Han® 3 A HIFF adapter for assembling the HIFF modules	09 45 515 0024
				Han® PushPull (V14) bulkhead mounted housing Black plastic Rectangular metal Round metal	09 35 012 0331 09 35 012 0311 09 35 012 0312
	Service interfaces		<ul style="list-style-type: none"> <li>Easy to assemble</li> <li>Compact design</li> </ul>	har-port RJ45 service interface, incl. HIFF coupling	09 45 452 1560
				har-port panel feed through, suitable for holding HIFF modules	09 45 452 0000
har-port RJ45 service interface with cable (RJ45 jack to RJ45 plug)				09 45 452 1501 - 09 45 452 1518	
Available as standard in lengths from 0.20 m to 10.00 m		<ul style="list-style-type: none"> <li>Available as standard in lengths from 0.20 m to 10.00 m</li> </ul>			

			Advantages	Description	Part number	
Connector	RJ45		<ul style="list-style-type: none"> <li>Industry-proven</li> </ul>	preLink® RJ45 connector	20 82 101 0010	
	Han® PushPull		<ul style="list-style-type: none"> <li>Compliant with PROFINET and AIDA</li> <li>Proven PushPull locking mechanism</li> </ul>	Han® PushPull (V14) preLink® RJ45 connector Plastic	20 82 204 0001	
				Han® PushPull (V14) preLink® RJ45 connector Straight metal 45° angled metal	20 82 104 0001 20 82 104 0045	
	Han® 3 A		<ul style="list-style-type: none"> <li>Standardised PROFINET connector</li> </ul>	Han® 3 A RJ45 preLink® insert	20 82 002 0001	
	M12			<ul style="list-style-type: none"> <li>Extremely robust For industrial and railway usage</li> </ul>	preLink® M12 D-coded connector, 4 poles	20 82 005 0001
				preLink® M12 X-coded connector, 8 poles	20 82 005 0002	
				preLink® male insert, M12 D-coded, 4 poles	20 82 005 1214	
				preLink® male insert, M12 X-coded, 8 poles	20 82 006 1218	
				preLink® M12 housing, empty	20 82 000 1210	
Accessories	Coupling		<ul style="list-style-type: none"> <li>The simplest cable transition</li> </ul>	preLink® Extender Cat. 6A	20 82 101 0001	
	Termination blocks			<ul style="list-style-type: none"> <li>The cable termination is easy to assemble and ensures process reliability</li> <li>Can be combined flexibly with all jacks and plugs</li> </ul>	preLink® cable termination block (AWG 24 – 22) for installation cable	20 82 000 0001 (Package quantity: 10 pieces)
					preLink® cable termination block (AWG 27 – 26) for flexible cable	20 82 000 0003 (Package quantity: 10 pieces)
			<ul style="list-style-type: none"> <li>Protects pre-assembled preLink® cables during feeding and routing</li> </ul>	preLink® protective cover	20 82 000 9915 (Package quantity: 10 pieces)	
	Tool			<ul style="list-style-type: none"> <li>Simultaneously crimps all IDC contacts safely while cutting off all individual wires properly</li> <li>The assembly is completed in one step</li> <li>Cycling ratchet mechanism</li> </ul>	preLink® assembly tool	20 82 000 9901
			<ul style="list-style-type: none"> <li>For opening all RJ45 jacks quickly and easily</li> </ul>	preLink® release tool	20 82 000 9916 (Package quantity: 10 pieces)	
System cables			<ul style="list-style-type: none"> <li>Ready assembled and tested system cables</li> </ul>	preLink® to preLink® cable 0.2 m up to 10 m	4 poles, Cat. 5 20 82 630 2xxx	
					8 poles, Cat. 6A 20 82 600 2xxx	
			<ul style="list-style-type: none"> <li>Ready assembled and tested system cables</li> </ul>	preLink® to RJ45 IP20 cable 0.2 m up to 10 m	4 poles, Cat. 5 20 82 631 1xxx	
					8 poles, Cat. 6A 20 82 601 1xxx	



Pushing Performance

**HARTING.com** –  
the gateway to your country website.

---

[www.HARTING.ae](http://www.HARTING.ae)  
[www.HARTING.at](http://www.HARTING.at)  
[www.HARTING.com.au](http://www.HARTING.com.au)  
[www.HARTING.be](http://www.HARTING.be)  
[www.HARTING.com.br](http://www.HARTING.com.br)  
[www.HARTING.ca](http://www.HARTING.ca)  
[www.HARTING.ch](http://www.HARTING.ch)  
[www.HARTING.com.cn](http://www.HARTING.com.cn)  
[www.HARTING.cz](http://www.HARTING.cz)  
[www.HARTING.de](http://www.HARTING.de)  
[www.HARTING.dk](http://www.HARTING.dk)  
[www.HARTING.es](http://www.HARTING.es)  
[www.HARTING.fi](http://www.HARTING.fi)  
[www.HARTING.fr](http://www.HARTING.fr)  
[www.HARTING.co.uk](http://www.HARTING.co.uk)  
[www.HARTING.com.hk](http://www.HARTING.com.hk)  
[www.HARTING.hu](http://www.HARTING.hu)  
[www.HARTING.co.in](http://www.HARTING.co.in)  
[www.HARTING.it](http://www.HARTING.it)  
[www.HARTING.co.jp](http://www.HARTING.co.jp)  
[www.HARTING.co.kr](http://www.HARTING.co.kr)  
[www.HARTINGbv.nl](http://www.HARTINGbv.nl)  
[www.HARTING.no](http://www.HARTING.no)  
[www.HARTING.pl](http://www.HARTING.pl)  
[www.HARTING.pt](http://www.HARTING.pt)  
[www.HARTING.ro](http://www.HARTING.ro)  
[www.HARTING.ru](http://www.HARTING.ru)  
[www.HARTING.se](http://www.HARTING.se)  
[www.HARTING.sg](http://www.HARTING.sg)  
[www.HARTING.sk](http://www.HARTING.sk)  
[www.HARTING.com.tr](http://www.HARTING.com.tr)  
[www.HARTING.com.tw](http://www.HARTING.com.tw)  
[www.HARTING-USA.com](http://www.HARTING-USA.com)  
[www.HARTING.co.za](http://www.HARTING.co.za)